Dy/power 🌑

BXL Series

Battery Extra Load Units

- Used in a system with BLU device to increase load capacity
- Lightweight starting from 12,5 kg (28 lbs.)
- Powerful discharge power up to 32,4 kW
- Voltage measurement range: up to 500 V DC
- Discharge current up to 330 A DC
- Measurement resolution current 1 A, voltage 1 V
- Discharge process controlled by BLU device
- Connects to battery terminals and parallel to BLU device



Description

Battery Extra Load Units BXL Series are designed as an additional load to be used with BLU series if required discharge current or power exceeds the capacity of available BLU device(s). BXL Series devices are based on a state-of-theart technology - the most advanced power electronics solutions are used as well as 6-8 fans which are integrated into the device. BXL Series are powerful devices which provide high discharge currents (up to 330 A DC) applicable up to 500 V DC battery systems. System of a BLU and BXL enables performing the capacity test in an accurate, user-friendly way in accordance to

battery testing standards (IEEE 450-2010 / 1188-2005 / 1106-2015, IEC 60896-11/22 and other relevant standards).

A BLU device (in a BLU-BXL system) ensures control of the discharge process. BXL simulates constant resistance load during the discharge test – its load parameter (resistance) can be set prior the discharge test. BXL provides flexibility in selecting its load capacities – several resistances can be set for most of nominal battery voltages. Overview of the maximum currents for various battery voltage ranges with the minimum achievable cell voltage of 1,75 V is presented in the Table 1.

Application

Typical application is supporting a BLU device as an additional load in measuring the capacity of the batteries that serve as a backup power supply in (but not limited to):

- Power plants
- Telecommunication systems
- Generator excitation systems
- Substations
- Protection and control systems



		Maximum currents (A)		
Battery voltage (V)		BXL-A	BXL-T	BXL-V
Nom.	Min/Max			
6	5,55	62	65	11
ŭ	7,05	80	80	15
12	11,1	125	132	23
12	14,1	160	165	30
24	22,2	196	264	50
24	28,2	250	330	65
48	44,4	192	254	101
40	56,4	245	320	130
60	55,5	85	199	128
60	70,5	105	250	165
110	101,75	126		94
110	129,3	160	-	120
120	111,0	137		101
120	141,0	175	-	130
220	203,5	63		82
	258,5	80	-	105
240	222,0	68	-	89
240	282,0	85		115
420	300,0		_	30
420	500,0	-	-	50
Weight (kg / lbs)		12,5 / 28	12,5 / 28	16 / 35
Max Power (kW)		24,8	18,0	32,4
Table 1				


Table 1

Connecting BXL to Battery

The BXL devices should be connected to a battery system at the same points as a BLU device – BLU, BXL and the battery are all connected in parallel. The current clamp needs to be used in order to provide the information to BLU on current drawn from the battery by BXL. The BLU regulates discharge process according to current value measured by the current clamp.

Connection between BLU and BXL device is established by the EXT LOAD TRIGGER channel on a BLU instrument (as show in the Figure 1), enabling the discharge process on BXL to start simultaneously with a BLU and be initiated by a BLU.

In case of multiple BXL devices connection, channels CONTROL OUT/IN are used for the discharge process triggering. Number of BXL devices that can be used with a BLU is not limited – the only limitation is the maximum current that can be measured by the available current clamp.

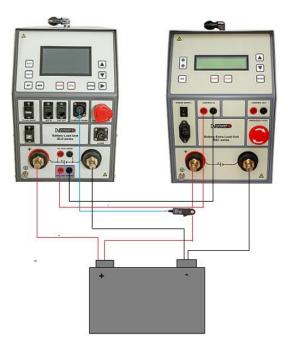

Figures 1: BLU + BXL to battery connection diagram

Dy/power 6

BXL Series - models

BXL-A



- designed for parallel operation with BLU-A series
- applicable to 5,55 V 300 V DC battery voltages
- weight 12,5 kg (28 lbs.)
- discharge power up to 24,8 kW
- discharge current up to 250 A

BXL-T



- designed for parallel operation with BLU220T device
- applicable to 5,55 V 70,5 V DC battery voltages
- weight 12,5 kg (28 lbs.)
- discharge power up to 18,0 kW
- discharge current up to 330 A

BXL-V



- designed for parallel operation with BLU360V device
- applicable to 5,55 V 500 V DC battery voltages
- weight 16,0 kg (35 lbs.)
- discharge power up to 32,4 kW
- discharge current up to 165 A

Accessories







Current cables

Extension cables

Transport case





Cable bag

Cable set for BLU-BXL simultaneous triggering



Technical Data

Mains Power Supply

Connection according to IEC/EN60320-1; C320

Voltage:

90 V - 264 V AC, 50 / 60 Hz, single-phase

Input power: 200 VA

Dimensions and Weights

Model	Dimensions	Weight
BXL-A	560 x 221 x 355 mm 22 x 8.7 x 14 in	12,5 kg 28 lbs.
BXL-T	560 x 221 x 355 mm 22 x 8.7 x 14 in	12,5 kg 28 lbs.
BXL-V	730 x 221 x 355 mm 28.7 x 8.7 x 14 in	16,0 kg 35 lbs.

Maximum discharge current & power

Model	Current	Power
BXL-A	250 A	24,8 kW
BXL-T	330 A	18,0 kW
BXL-V	165 A	32,4 kW

Measurement

Internal voltage measurement

Model	Range	Resolution
BXL-A	0 – 300 V DC	1 V
BXL-T	0 – 75 V DC	1 V
BXL-V	0 – 500 V DC	1 V

Typical accuracy: ± 0,5% of reading ± 1 V

Internal current measurement

Model	Range	Resolution
BXL-A	0 – 300 A DC	1 A
BXL-T	0 – 450 A DC	1 A
BXL-V	0 – 250 A DC	1 A

Typical accuracy: ± 0,5% of reading ± 1 A

Warranty

 3 years + additional 1 (one) year upon registration on DV Power official website (www.dv-power.com)

Display

- LCD screen 16 characters by 2 lines
- LCD display with backlight, visible in bright sunlight

Environment conditions

- Operating temperature:
 -20 °C to +55 °C / -4 °F to +131 °F
- Storage & Transportation temperature:
 -40 °C to +70 °C / -40 °F to +158 °F
- Relative humidity 0 95%, non-condensing
- Pollution degree: 2

Protection

- Emergency Stop button
- Overheat and Overvoltage protection

Applicable Standards (for BLU-BXL system)

- IEEE 450-2010, IEEE 1188-2005, IEEE 1106-2015, IEC 60896-11, IEC 60896-22 and other relevant standards
- Installation/overvoltage: category II
- Pollution: degree 2
- Safety
 - Low Voltage Directive:
 Directive 2014/35/EU (CE conform)

 Applicable standards, for a class I instrument, pollution degree 2,
 Installation category II: IEC EN 61010-1
- Electromagnetic Compatibility:
 - Directive 2014/30/EU (CE conform) Applicable standard: EN 61326-1
- CAN/CSA-C22.2 No. 61010-1



Order Info

Instrument	Article No
Battery Extra Load Unit BXL-A	BXL400X-A-00
Battery Extra Load Unit BXL-T	BXL400X-T-00
Battery Extra Load Unit BXL-V	BXL400X-V-00

Included Accessories	Article No
Mains Power cable	MPCXXA-XX-00
Ground (PE) cable	CABLE-GND-00
Transport case for BLU – medium size (for BXL-A and BXL-T models)	HARD-CASE-BL
Transport case for BLU – large size (for BXL-V model)	HARD-CASE-B1
Recommended	Article No
Current cables 2 x 3 m 35 mm ² (9.84 ft., 2 AWG) with alligator clamps (A4) isolated (for BXL-A and BXL-V models)	C2-03-35VA4I
Current cables 2 x 3 m 70 mm ² (9.84 ft., 00 AWG) with alligator clamps (A4) isolated (for BXL-T model)	C2-03-50FA4I
Cable bag	CABLE-BAG-00

Optional	Article No
Cable set 2 x 2 m 1 mm ² (6.56 ft., 17 AWG) for BLU-BXL simultaneous triggering (all models)	PO-02-01BPBP
Cable set 2 x 5 m 1 mm ² (16.4 ft., 17 AWG) for BLU-BXL simultaneous triggering (all models)	PO-05-01BPBP
Current cables 2 x 3 m 50 mm ² (9.84 ft., 0 AWG) with alligator clamps (A4) isolated (for BXL-A and BXL-V models)	C2-03-50VA4I
Current cables 2 x 5 m 35 mm ² (16.4 ft., 2 AWG) with alligator clamps (A4) isolated (for BXL-A and BXL-V models)	C2-05-35VA4I
Current cables 2 x 10 m 35 mm ² (32.8 ft., 2 AWG) with alligator clamps (A4) isolated (for BXL-A and BXL-V models)	C2-10-35VA4I
Current cables 2 x 5 m 50 mm ² (16.4 ft., 0 AWG) with alligator clamps (A4) isolated (for BXL-A and BXL-V models)	C2-05-50VA4I
Current cables 2 x 5 m 70 mm ² (16.4 ft., 00 AWG) with alligator clamps (A4) isolated (for BXL-T model)	C2-05-70FA4I
Extension cables 2 x 5 m 35 mm ² (16.4 ft., 2 AWG) (for BXL-A and BXL-V models)	E2-05-35VA3I
Extension cables 2 x 10 m 35 mm ² (32.8 ft., 2 AWG) (for BXL-A and BXL-V models)	E2-10-35VA3I